



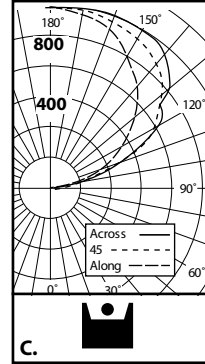

## Photometric data

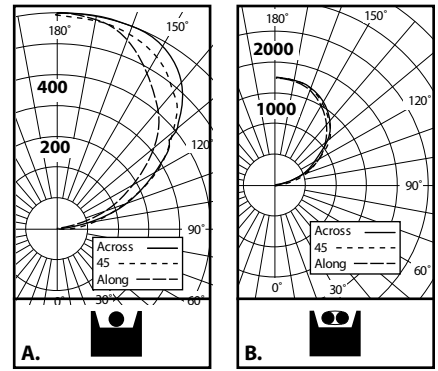

- A. P-I-0214T8-LP/ELB** 80.0 % Efficiency  
Litecontrol Certified Test Report #27811000
- B. P-I-0224BX40-LP/ELB** 80.2 % Efficiency  
Litecontrol Certified Test Report #27820000
- C. P-I-0214T5HO-LP/ELB** 82.0 % Efficiency  
Litecontrol Certified Test Report #27816002


## Ballast options

**LPD/ELB** Low-profile dimming ballast. Manufactured by a UL Listed manufacturer, as available, contact factory for availability.

## Options

- F** Fuse. Slow or fast blow, determined by Litecontrol.
- LP/EF** Low-profile emergency fluorescent ballast. Battery-powered ballast from a UL Listed manufacturer will operate one T8, T5, or T5HO lamp for 1 1/2 hours.

## Row diagram

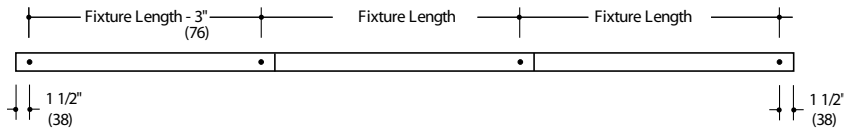

Fixture Lengths: 54", 102" and 150"  
• Indicates pendant locations

online  
**Quick Find**  
Click on



**22**